


**INSTALLATION INSTRUCTIONS  
USING 1-3/4" DOORS  
DOOR PLATES FLUSH WITH  
FACING SIDES OF DOORS**

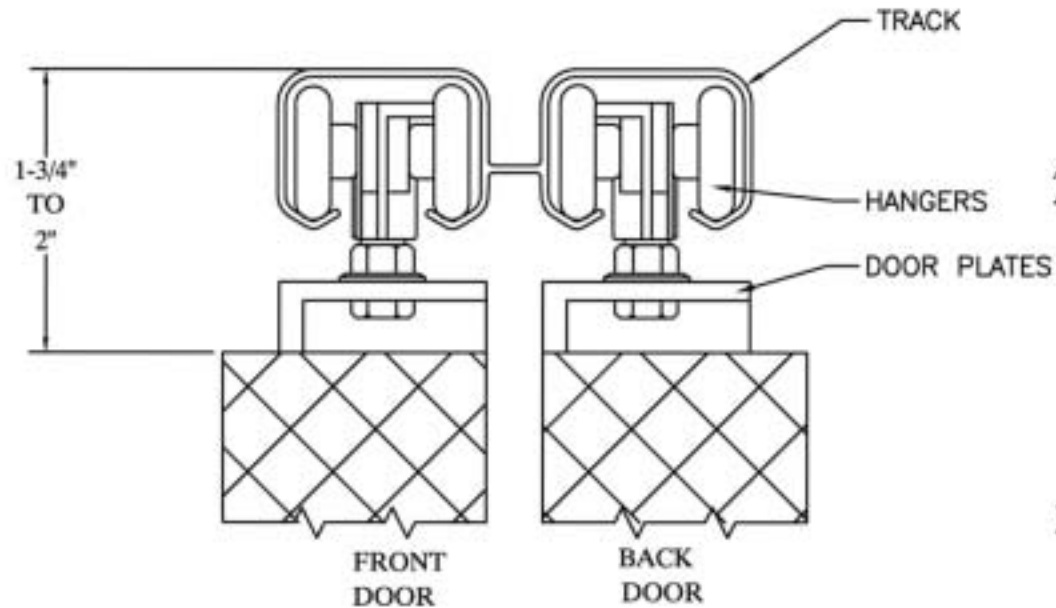

If using Fascia, allow 5/8" between Fascia and Track for clearance:  
Allow 1/2" between bottom of door and finished floor.

© Copyright 2004  
John Sterling Corporation  
Richmond, Illinois 60071

8493-1676  
Rev. 03/02

## 1. Install Track & Rollers

Track should be installed to leave a gap at one end for easy installation of rollers:  
1" (25.4mm) gap for 7/8" (22.23mm) wheels

If track is installed with no gap, rollers must be inserted before track is mounted.

## 2. Mount Door Plates



## 3. Hang and Adjust Door:

Attach door to rollers. Turn adjusting bolt for height and plumb adjustments. Tighten hanger jam nut securely.



## 4. Install Door Guide, Stops and Pulls.

Two Door Installation  
with Door Stop

